



Made in EU



György Szappanos

• **500W**  
• **17kg** (37.5 lbs)

## FEATURES

- 500W class-D power amplifier
- 2x10" high-power Neo speaker
- 1" throat HF driver
- Ultra HI-Z input stage
- 3 band parametric EQ
- Extremely low weight
- Contour frequency shaping
- Versatile DI-output  
(pre- or post EQ, -20dB pad, GND lift)

Conventional conceptions around bass amplification power-to-weight ratio has been totally revolutionized by Garry ELECTRONIC's LITE technology. High SPL, huge power, exceptionally detailed sound and, of course amazing light weight are the main features of the new LIGHTGEAR 210 Bass combo. The special ultra-lightweight plywood structure results a robust, yet light cabinet construction. High power neodymium-motor speakers ensures tight and well-detailed low end with amazing articulation in the midrange, even at high levels. A ferrofluid cooled 1.5" compression driver stands for crisp and powerful highs. A carefully designed extremely high impedance preamp ensures, that even instruments with passive electronics can sound with full dynamics and details. A three band parametric EQ combined with an adjustable/switchable contour function enables the rise of all styles from this tiny bass-combo. The Ultra-HiZ preamp powered with 500W digital amplification and quality speaker components sets all of your instrument's dynamics free! Tight-, well defined sound, loudest in it's size and of course light as feather! You will love it!



# LIGHTGEAR 210

ULTRA-LIGHT BASS COMBO


LIGHTGEAR.GARRY.HU  
INFO@GARRY.HU



Made in EU

# LIGHTGEAR 210

ULTRA-LIGHT BASS COMBO

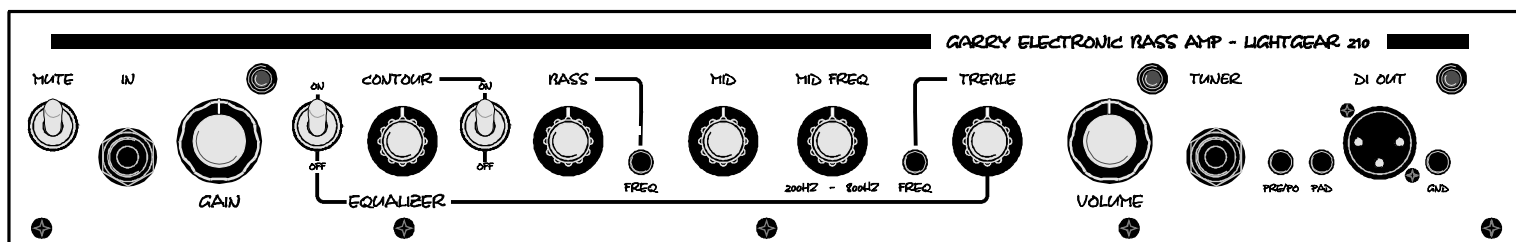

## TECHNICAL SPECIFICATIONS:

SPEAKERS:	2x10" neodymium motor driver 1" throat HF driver
AMP. POWER:	530W (EIAJ, 1kHz, 1% THD) Class-D
INPUT:	Ultra HI-Z (>10MΩ), 1/4" TRS, with mute switch
GAIN:	Wide range, continuously adjustable (tip.range: 50dB)
EQ:	3 band parametric EQ + Contour shaping High freq. (switchable, 2kHz/4kHz), Low freq. (switchable, 100Hz/50Hz) Midrange (200Hz-800Hz sweepable) CONTOUR on/off, EQ on/off (true bypass, switches off all freq. Corrections!)
TUNER OUTPUT:	1/4" TS asymmetric
INDICATORS:	1. - preamp clip, incl. EQ, CONTOUR, 2. - power amplifier limit level
DI-OUTPUT:	balanced (XLR), PRE/POST EQ, -20dB PAD, GND lift
MAINS POWER:	230V AC, 4A / 115V, 6.3A
DIMENSIONS:	480mm x 510mm x 410mm (H x W x D) 18.89" x 20.07" x 16.14" (H x W x D)
WEIGHT:	17 kg (37.5 lbs)

[LIGHTGEAR.GARRY.HU](http://LIGHTGEAR.GARRY.HU)

[INFO@GARRY.HU](mailto:INFO@GARRY.HU)